



Schemi tecnici

Montavivande





Dimensioni & ingombri

Modello	Portata kg	Cabina mm			Vano mm		Porte posiz. B mm		Porte Posiz. A-C mm	
		Larghezza CW	Profondità CD	Altezza CH	Larghezza SW	Profondità SD	Larghezza DW	Altezza DH	Altezza DH	Altezza DH
DD	24/50	320	510	800	540	745	ND	ND	320	800
DL	24/50	420	545	800	660	835	320	800	420	800
39/5	24/50	520	420	800	760	710	420	800	320	800
NR	24/50	520	520	800	760	810	420	800	420	800
41/5	24/50	520	520	1000	760	810	420	1000	420	1000
01/05/14	24/50	520	620	800	760	910	420	800	520	800
03/05/14	24/50	520	720	800	760	1010	420	800	620	800
04/05/14	24/50	520	720	1000	760	1010	420	1000	620	1000
42/5	24/50	620	420	800	860	710	520	800	320	800
05/05/14	24/50	620	520	800	860	810	520	800	420	800
MG	24/50	620	620	800	860	910	520	800	520	800
48/5	24/50	620	620	1000	860	910	520	1000	520	1000
07/05/14	24/50	620	720	800	860	1010	520	800	620	800
50/5	24/50	720	420	800	960	710	620	800	320	800
13/05/14	24/50	720	520	800	960	810	620	800	420	800
17/05/14	24/50	720	620	800	960	910	620	800	520	800
21/05/14	24/50	720	720	800	960	1010	620	800	620	800
22/05/14	24/50	720	720	1000	960	1010	620	1000	620	1000
29/05/14	24/50	820	620	800	1060	910	720	800	520	800
33/5	24/50	820	720	800	1060	1010	720	800	620	800
34/5	24/50	820	720	1000	1060	1010	720	1000	620	1000
MGS	100	620	620	800	860	910	520	800	520	800
11/10/14	100	620	820	800	860	1110	520	800	720	800
54/10	100	720	720	800	960	1010	620	800	620	800
MGT	100	720	720	1000	960	1010	620	1000	620	1000
23/10/14	100	720	820	800	960	1110	620	800	720	800
24/10/14	100	720	820	1000	960	1110	620	1000	720	1000
37/10	100	820	820	800	1060	1110	720	800	720	800
38/10	100	820	820	1000	1060	1110	720	1000	720	1000
MDL1	100	820	820	1200	1060	1110	720	1200	720	1200
62/20	200	830	730	1200	1070	1060	720	1200	620	1200
MDL2	200	1000	1000	1200	1240	1330	900	1200	900	1200
MDL3	300	1000	1000	1200	1240	1330	900	1200	900	1200

24-50-100 kg

200-300 kg

Min. S = * (senza paracadute) *= 130+CH/2 (cancello doppia ghigliottina)
 Min. S = 600 (con paracadute) *= 400 (porta a battente)

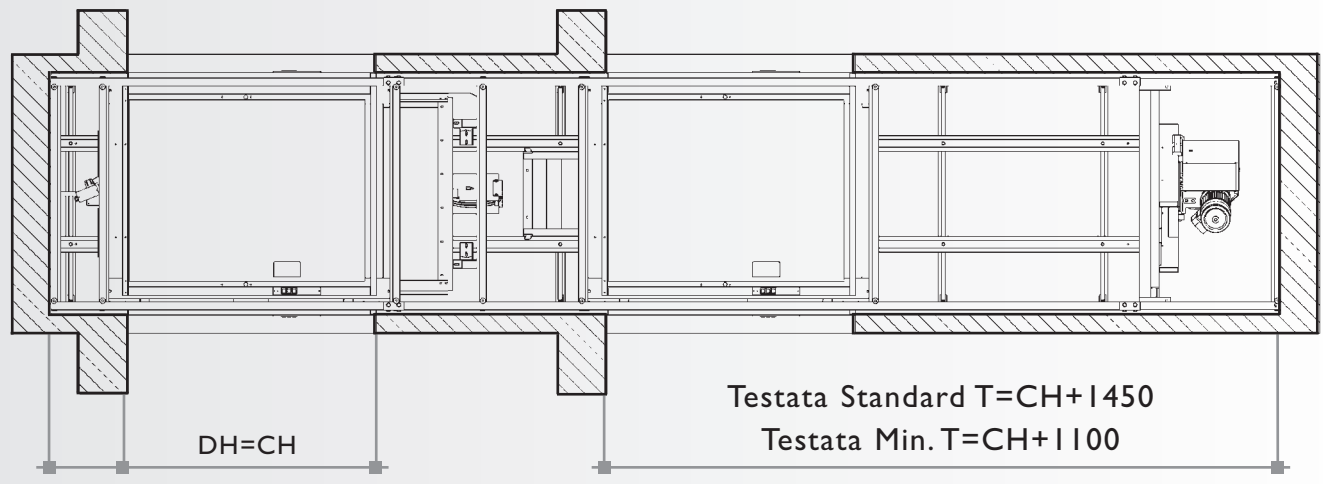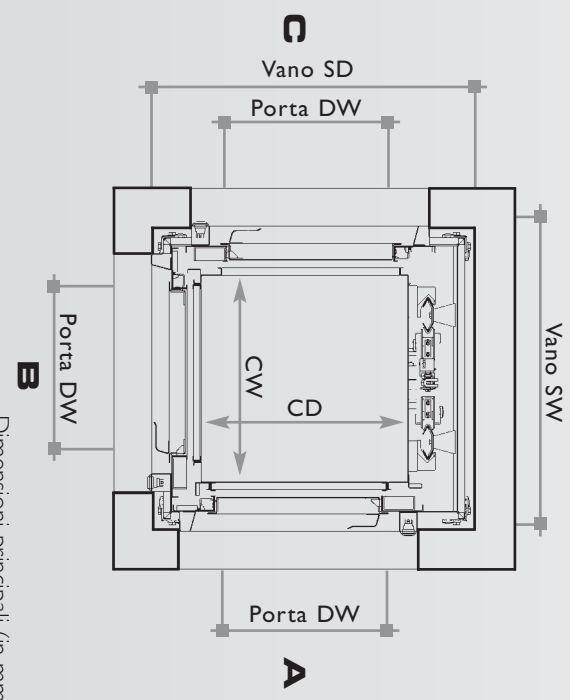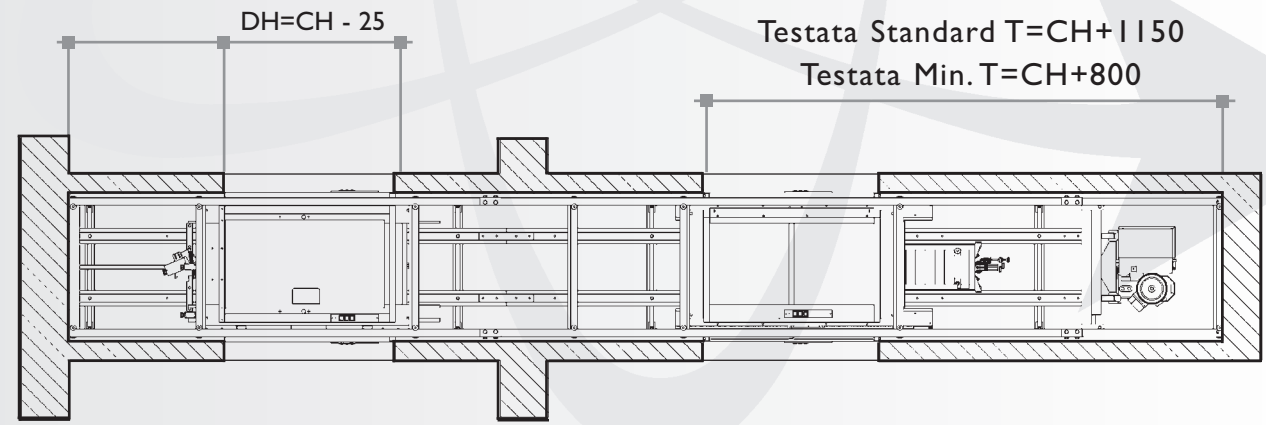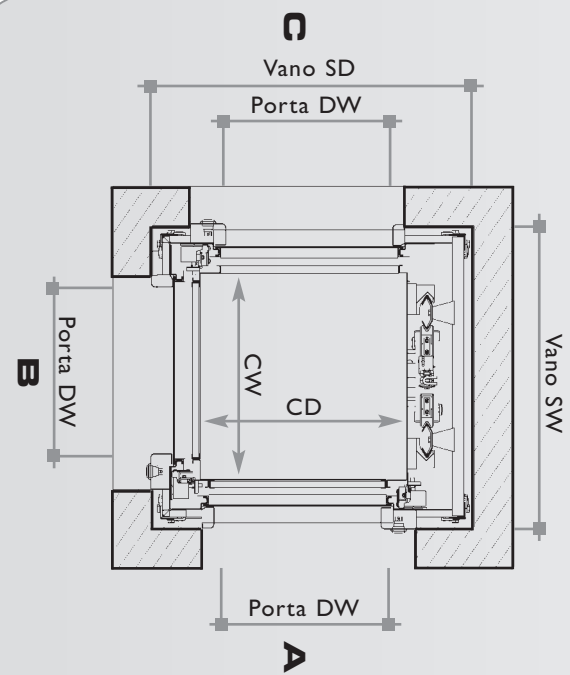

Richiedere fattibilità per quote diverse

Min. S=400 (senza paracadute)
 Min. S=600 (con paracadute)

Dimensioni principali (in mm)